



Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH

**Research
Report**
RR-92-32

**Designing a Structured Lexicon
for
Document Image Analysis**

Rainer Hoch, Michael Malburg

July 1992

**Deutsches Forschungszentrum für Künstliche
Intelligenz
GmbH**

Postfach 20 80
67608 Kaiserslautern, FRG
Tel.: (+49 631) 205-3211/13
Fax: (+49 631) 205-3210

Stuhlsatzenhausweg 3
66123 Saarbrücken, FRG
Tel.: (+49 681) 302-5252
Fax: (+49 681) 302-5341

Deutsches Forschungszentrum für Künstliche Intelligenz

The German Research Center for Artificial Intelligence (Deutsches Forschungszentrum für Künstliche Intelligenz, DFKI) with sites in Kaiserslautern and Saarbrücken is a non-profit organization which was founded in 1988. The shareholder companies are Atlas Elektronik, Daimler-Benz, Fraunhofer Gesellschaft, GMD, IBM, Insiders, Mannesmann-Kienzle, SEMA Group, Siemens and Siemens-Nixdorf. Research projects conducted at the DFKI are funded by the German Ministry for Research and Technology, by the shareholder companies, or by other industrial contracts.

The DFKI conducts application-oriented basic research in the field of artificial intelligence and other related subfields of computer science. The overall goal is to construct *systems with technical knowledge and common sense* which - by using AI methods - implement a problem solution for a selected application area. Currently, there are the following research areas at the DFKI:

- Intelligent Engineering Systems
- Intelligent User Interfaces
- Computer Linguistics
- Programming Systems
- Deduction and Multiagent Systems
- Document Analysis and Office Automation.

The DFKI strives at making its research results available to the scientific community. There exist many contacts to domestic and foreign research institutions, both in academy and industry. The DFKI hosts technology transfer workshops for shareholders and other interested groups in order to inform about the current state of research.

From its beginning, the DFKI has provided an attractive working environment for AI researchers from Germany and from all over the world. The goal is to have a staff of about 100 researchers at the end of the building-up phase.

Friedrich J. Wendl
Director

Designing a Structured Lexicon for Document Image Analysis

Rainer Hoch, Michael Malburg

DFKI-RR-92-32

This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such copies include the following notice: permission of the author and individual contributors to the work; all applicable copyright notices; and acknowledgment of the author and individual contributors to the work; all applicable copyright notices. Copying, reproducing, or redistributing for any other purpose than research without payment of fee to Deutsches Forschungszentrum für Künstliche Intelligenz is prohibited.

© Deutsches Forschungszentrum für Künstliche Intelligenz, 1993

This report is an improved and long version of a paper published in Proceedings of the Seventeenth Summer School on Information Technologies and Programming, Sofia, June 28 – July 5, 1992.

This work has been supported by a grant from The Federal Ministry for Research and Technology (FKZ ITW-9003 0).

© Deutsches Forschungszentrum für Künstliche Intelligenz 1993

This work may not be copied or reproduced in whole or in part for any commercial purpose. Permission to copy in whole or in part without payment of fee is granted for nonprofit educational and research purposes provided that all such whole or partial copies include the following: a notice that such copying is by permission of Deutsches Forschungszentrum für Künstliche Intelligenz, Kaiserslautern, Federal Republic of Germany; an acknowledgement of the authors and individual contributors to the work; all applicable portions of this copyright notice. Copying, reproducing, or republishing for any other purpose shall require a licence with payment of fee to Deutsches Forschungszentrum für Künstliche Intelligenz.

Designing a Structured Lexicon for Document Image Analysis ¹

Rainer Hoch*, Michael Malburg†

German Research Center for Artificial Intelligence (DFKI)
P.O. Box 20 80, D - 67608 Kaiserslautern, Germany
Phone: (++49) 631-205-3584, Fax: (++49) 631-205-3210
* hoch@dfki.uni-kl.de, † malburg@dfki.uni-kl.de

ABSTRACT: This paper presents a structured, multi-level architecture of a lexicon which is a central component of our knowledge-based document analysis system. Our system has the task to transform incoming business letters into an equivalent electronic representation automatically. Moreover, partial text analysis and understanding of a letter's body and relevant parts are initiated to enrich the conceptual knowledge about the actual document (e. g., by a classification). In such an application domain, a well-designed lexicon has to consider requirements of both, text recognition and text analysis. For that purpose, we propose an appropriate lexicon architecture and the internal structure of corresponding lexical entries being a prerequisite for successful higher-level interpretations of documents.

CONTENTS:

1 Introduction	2
2 Requirements of a lexicon for document image analysis	3
3 Architecture of a structured lexicon	5
4 Internal structure of lexicon entries	6
5 State of implementation and current activities	9
References	10

KEYWORDS: office automation, document image analysis, structured lexicon, text recognition, text analysis, lexical knowledge.

¹ This work has been supported by the Germany Ministry for Research and Technology BMFT under contract ITW 9003 0.

1 Introduction

In the last years many people have predicted the paperless office where paper documents would be obsolete. Despite all efforts in office automation, offices produce more paper than ever before. One reason for this observation is the weakness of commercial office information systems in supporting an international standard representation to facilitate the exchange of documents between heterogeneous systems. In consequence, paper documents will further remain the most popular and dominating medium for exchanging information. By this way, tools for getting existing paper documents into an equivalent symbolic representation on the computer, called paper-computer-interfaces, become increasingly important.

In this paper the lexicon component of our document analysis system is presented which is one current result of the ALV project (German acronym for Automatic Reading and Understanding). The intention of the system is to bridge the gap between traditional print products and the computer. Exemplary, the structure and semantics of German business letters are analyzed. The system is model-driven based on the ODA (Office Document Architecture) platform [ISO8613], i. e., an international standard for the representation of layout and logic structures and the exchange of documents is supported [Dengel et al92a].

In order to understand challenges and constraints in the design of an appropriate lexicon for document image analysis and to give a point of orientation, our system will be described in short (see also Figure 1). The entire system includes several interwoven phases of analysis: *Layout extraction* comprises all low-level processing routines like skew angle adjustment and segmentation to investigate the layout structure of a document. *Logical labeling* is used to hypothesize the logical meaning of layout objects. *Text recognition* explores the captured text of logical objects. By this way, word hypotheses are generated, verified and redundant word candidates are eliminated. Finally, a *partial text analysis* of selected objects (sender, subject, body) is initiated for classifying the document (invoice, order, offer, etc.) and retrieving conceptual information. As output, a symbolic representation of the actual business letter is generated that conforms to ODA. Further details and experimental results of the system are given in [Dengel89, Dengel et al92b].

This paper focusses on the presentation of a structured lexicon and corresponding access mechanisms. It is organized as follows: In the next chapter fundamental lexicon requirements are explained, set by both text recognition as well as text analysis. Note that these requirements are conflicting sometimes, i. e., a complete and best solution, a panacea, of this problem does not exist! While in Chapter 3 a multi-level architecture of our structured lexicon with respect to document analysis is developed, Chapter 4 exhibits a possible internal structure for lexical entries. Finally, the last chapter shows state of implementation and points out to our current research activities.

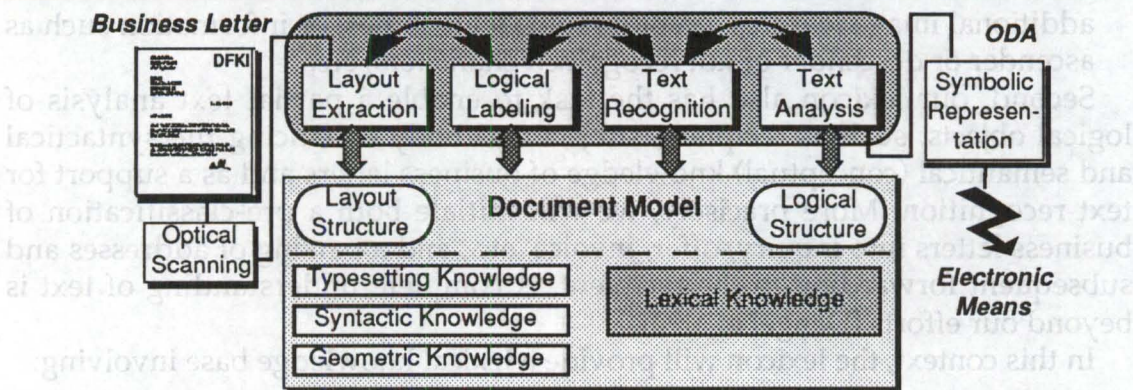


Figure 1: Global ALV-system architecture.

2 Requirements of a lexicon for document image analysis

Designing a lexicon for document image analysis is restrained to consider the requirements of two system components: text recognition and text analysis (cf. Chapter 1). These requirements are discussed in the following in more detail.

First, document analysis systems use either a lexicon (dictionary) or probabilistic methods (Markov models) to improve results of *text recognition* [Elliman90, Wells90]. Dictionary look-up techniques involve verifying an input word against legal dictionary words. In this case, structuring or partitioning the dictionary is a promising strategy for pruning the search space. However, recognition errors and incorrect character/word segmentation complicate the access and organization of a dictionary. For instance, characters are often broken or merged because of small point sizes, kerned, bold or italicized typefaces, ligatures as well as errors resulting from noise, low resolution or truncation of lines (latter is typical for faxes).

Hence, text recognition is primarily concerned with the spelling of a word form. Consequently, requirements for the lexicon include:

- compact storage allocation for storing large parts of the dictionary in main memory and for minimizing access time;
- tolerance and robustness towards recognition errors;
- in case of complete words, fast search algorithms and efficient data structures for their verification;
- in case of incomplete words, efficient pattern matching algorithms that treat queries of increasing complexity (character alternatives perhaps accompanied by certainty factors; rejection of single, non-identified characters; one or more wildcards of fixed or variable length, etc.);
- generation of appropriate word hypotheses according to incomplete input;
- dynamics: the set of words represented in the dictionary will be modified and enlarged in course of time;
- openness: an open and flexible interface which allows the specification of other knowledge sources being ascertained by image analysis, for example,

additional image features, cryptographical attributes, or information such as ascender or descender of not recognized characters, etc.

Second, our lexicon also has the task to enable a partial text analysis of logical objects, such as recipient, subject and body enhancing the syntactical and semantical (conceptual) knowledge of business letters and as a support for text recognition. More precisely, we will initiate both a pre-classification of business letters into inquiry, offer, invoice, etc., and a parsing of addresses and subsequent forwarding to the recipient. A complete understanding of text is beyond our efforts [Dengel et al92].

In this context, the lexicon will provide a lexical knowledge base involving:

- rich morphosyntactical information such as word category, stem, inflection, synonyms, homonyms, variants, usage, etc. as well as associative links to other entries (relations);
- semantical links to external, specialized dictionaries, in particular to a thesaurus;
- a definition of logical views according to the document architecture model of ODA which reflect a structural restriction of context (e. g. employees of a company, all possible city names within an address);
- a homogeneous and coherent representation (lexical structure) which facilitates the acquisition and modification of lexical knowledge and increases the lexicon's flexibility.

Figure 2 illustrates the central position of our lexicon in the ALV environment.

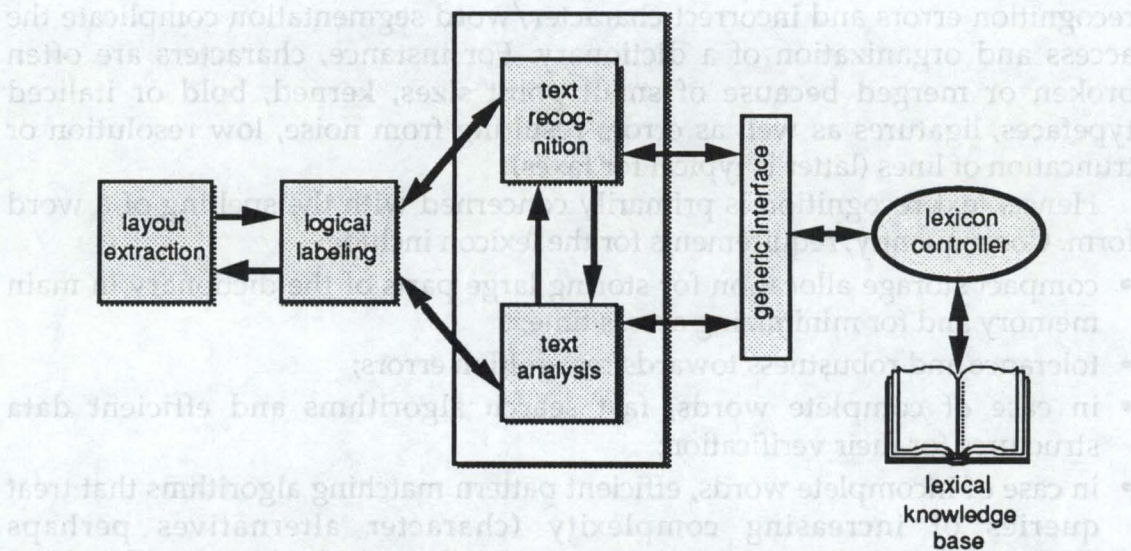


Figure 2: Phases of document image analysis and lexicon component.

3 Architecture of a structured lexicon

Having given an impression of our application domain and resulting requirements, we will now propose a multi-level architecture for a structured lexicon. Our work has been influenced by a dictionary concept shown in [Peterson80a] which is originally designed, however, to assist spelling checking and does not support a representation of lexical knowledge.

How can a lexicon be structured efficiently? A first approach to specify alternative structures is based on the frequency of word usage (see Figure 3). In the general case, a small number of words is used most frequently in documents. In German, the most frequent 500 words cover 63% of common text [Meier78]. Typically, these words have a length up to 6 characters. Because text recognition is more robust in finding short words (articles, conjunctions, adjectives, etc.) and corresponding errors only refer to one or two characters, we compiled and stored them in a separate subdictionary allowing fast access of complete words and simple error elimination. This matches the second and third requirement of text recognition in Chapter 2. Other high-frequency words are collected in a second subdictionary that is extended by an selective access matrix allowing efficient matching of fragmentary input strings (fourth and fifth requirement; see also Chapter 5) [Dengel et al92b].

In parallel, there are several domain-specific dictionaries. They include specific words or phrases which are significant for a particular application domain, actually business correspondence (e. g. "offer", "enclosed you find", "best regards", "sincerely", ...). Note that these dictionaries are pluggable: on demand they can be added or taken away for reasons of efficiency.

Furthermore, we provide logical dictionaries in accordance with logical objects of a document (cf. [ISO8613]). Logical objects divide the contents of a letter into entities associated with an sender's intellectual meaning such as subject, address or date. Each logical dictionary represents a restriction of context accompanied by a special vocabulary and phrases (requirement three of text analysis).

Beside their (orthographical) word form, lexical entries are related to a lexical frame containing different frequency counts, simple morphological and syntactical information as well as housekeeping information (source, author, date, etc.). The detailed internal structure of entries will be described in the next chapter.

Finally, a lexicon controller supervises access of all subdictionaries, the initial loading of entries and the global organization of dictionary parts. For instance, it determines in which order input words are searched for. Right now, the scheduler implemented consults all subdictionaries sequentially. More complex and intelligent strategies have to be developed as the system evolves.

Figure 3 visualizes the architecture of our prototypical structured lexicon.

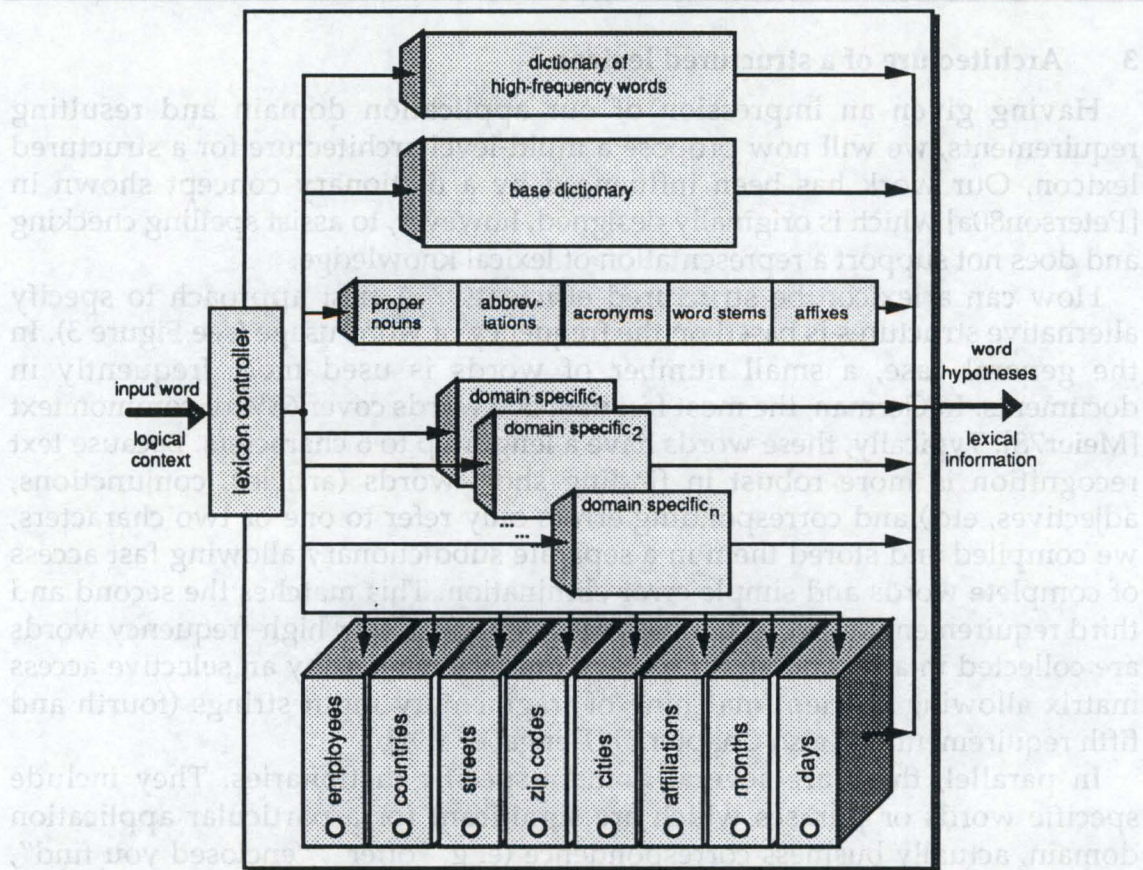


Figure 3: Multi-level architecture of lexicon.

4 Internal structure of lexicon entries

In Chapter 3 we have described the overall architecture of a structured lexicon. Now we want to examine what the elements of a lexical entry look like. By *internal structure of lexical entries* we mean the contents of one isolated entry as well as their structural setup (see also [Harris85, Bläser90]). Requirements given in Chapter 2 have to be considered in order to satisfy both system components related to the lexicon: text recognition and text analysis.

At least implicitly any dictionary presupposes a certain grammar to be known by the user. For example, it seems impossible to find the entry for German *gearbeitet* (has *worked*) without additional knowledge. In this example, one has to know that verb entries appear in infinitive form (*arbeiten*, to *work*), and that the past participle in German is formed with prefix *ge-* and suffix *-et*. Therefore, an electronic dictionary has to obey that grammar represented by programs using it. We are going to specify such a structure by grouping hierarchically several attributes, i. e., the lexical information concerning a lemma.

In order to support different steps of analysis, we distinguish attributes corresponding to orthography, necessary to support text recognition, and linguistic information for text analysis. Besides, it may be useful to represent

some diasystematic (style, usage, ...) and statistical (frequency) information. A short description of these attributes is given now.

Attribute group *orthography* contains spelling and hyphenation of the lexical entry. For recognition, the specification of hyphenation is important to distinguish between a dash of a parenthesis and a dash in hyphenation.

Linguistic information is separated into *morphology*, *syntax* and *semantics*, which seems sufficient for our needs. A morphological component has close connections to the lexicon as it reduces the number of entries and primarily is used for verification of a words existence. However, a distinction between slots morphology and syntax is not easy in every case. For example, the standard categorization of words in nouns, verbs, adjectives and so on has both a morphological and a syntactical effect.

By pure morphological examination, a categorization of words starts with the distinction of inflecting and non-inflecting words. A subcategorization considers the multitude of inflectional classes, e. g. for regular and "strong" verbs. Here is an example:

("schreiben"	(morphology	(category	. strongVerb)
		(addStems	(past . "schrieb")
			(participle . "geschrieben"))))

Information essential for a syntactic parser is summarized in the group *syntax*. Most important of a word is its syntactic category and subcategorizations like the gender for nouns. For a semantic representation, the underlying representation language is important. It has to provide subsumption hierarchies with (multiple) inheritance and possibilities to represent semantical links as mentioned in Chapter 2.

Finally, frequency information is helpful for all analysis components to enable a weighting of hypotheses on basis of statistical data. By this way, frequency-driven strategies may prune the search space. We add whether the frequency given concerns the word form itself or all inflectional forms of this lemma. Furthermore, the underlying statistical source or data base (text corpus) is entered.

Figure 4 gives a more detailed example of the structure of lexical entries.

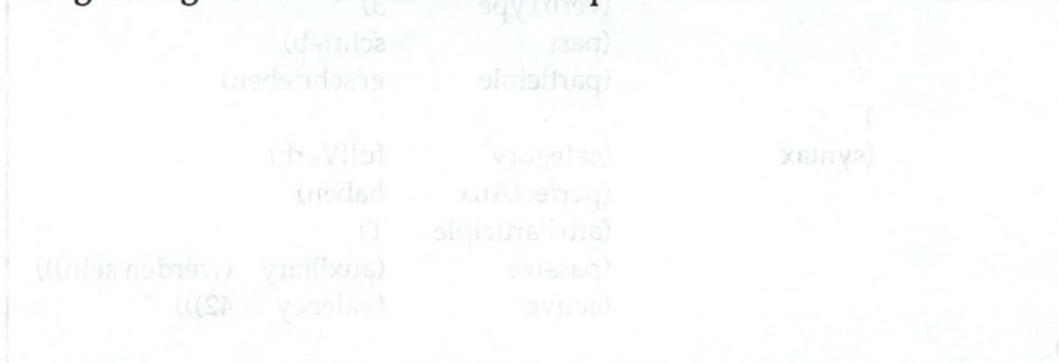


Figure 4: Structure of lexical entries.

(geschrieben	(morphology	(stem	participle2)
		(inflection	participle2)
)		(lemma	↑schreiben))
(schreibend	(morphology	(stem	participle1)
		(inflection	participle1)
)		(lemma	↑schreiben))
(schreibst	(morphology	(inflection	present 2nd singular)
		(lemma	↑schreiben))
)			
(schriebst	(morphology	(inflection	past 2nd singular)
		(lemma	↑schreiben))
)			
(schrieb	(morphology	(stem	past)
		(inflection	past (1st 3rd) singular)
)		(lemma	↑schreiben))
(schreib	(morphology	(stem	present)
		(inflection	imperative singular)
)		(lemma	↑schreiben))
(schreiben	(diasystematic	(style	standard)
		(usage	no)
)			
(frequency		(Ruoff81	84/105939)
		(Meier67	93/10910777)
)			
(morphology		(category	strongVerb)
		(inflection	infinitive
			(present (1st 3rd) plural))
		(verbType	3)
		(past	schrieb)
		(participle	geschrieben)
)			
(syntax		(category	fullVerb)
		(perfectAux	haben)
		(attrParticiple	T)
		(passive	(auxiliary (werden sein)))
		(active	(valency 42)))
)			

Figure 4: Structure of lexicon entries.

5 State of implementation and current activities

A first prototype of our structured lexicon has been implemented on Sun SPARCstations in Common Lisp/CLOS. We have also connected the lexicon with one of our text recognition specialists (based on feature extraction of characters) improving its results dramatically [Dengel et al92b].

At moment, the lexicon comprises a basis of 500 high-frequency German word forms that are stored separately in a specialized hash table allowing fast access of words and rudimentary error elimination. Additionally, our base dictionary contains further 8500 words collected in a trie data structure. This trie is extended by an selective access matrix for incomplete input and provides efficient search heuristics [Dengel et al92b, Knuth73].

All lexicon entries are enhanced by frequency counts of different text corpora and simple morphosyntactical information gained from a morphological tool for German [Finkler86, Finkler88]. Note that frequency counts and word statistics are used for a pre-classification of business letters applying traditional techniques of information retrieval [Dittrich92]. Furthermore, word stems and affixes are represented in the lexicon, too [Wagner92].

Our current research activities are concentrated on the following four topics:

A generic interface for utilizing additional results of text recognition (beyond ASCII level) is under development. First, it will allow the treatment of word hypotheses networks with probabilities for each character including wildcards for unrecognized ones. Second, this interface also deals with the coding of outcomes from an alternative cryptographical text recognition.

The lexicon controller introduced in Chapter 3 will be enhanced by intelligent control strategies, e. g., to take advantage of logical views. Such techniques are thought for pruning search space in a larger lexicon.

To enable a flexible (re-)structuring of the architecture developed in Chapter 4, we would prefer a lexical database with a user-interface for acquisition and maintenance. During start-up of the system, it should be compiled into an internal representation. Thereby an expansion of lexical templates, as used in natural language processing, should be performed.

Finally, a full integration of text analysis into the existing system is striven for. Especially, a broader usage of morphosyntactical information in supporting text recognition is enforced. For that goal, it is necessary to enhance the internal structure of lexical entries with more linguistic knowledge.

References

- [Bläser90] B. Bläser, M. Wermke. Projekt "Elektronische Wörterbücher/Lexika": Abschlußbericht der Definitionsphase. *IBM IWBS Report 145*, Heidelberg, November 1990.
- [Dengel&Barth89] A. Dengel, G. Barth. ANASTASIL: Hybrid Knowledge-based System for Document Image Analysis. *Proc. of the IJCAI '89*, vol. 2, Detroit, MI, 1989, pp. 1249-1254.
- [Dengel et al92a] A. Dengel, R. Bleisinger, R. Hoch, F. Fein, F. Hönes. From Paper to an Office Document Standard Representation. *IEEE Computer*, special issue on document image analysis, 1992 (to appear).
- [Dengel et al92b] A. Dengel, A. Pleyer, R. Hoch. Fragmentary String Matching by Selective Access to Hybrid Tries. Submitted to: *11th International Conference on Pattern Recognition*, The Hague, Aug./Sept., 1992.
- [Dittrich92] Stefan Dittrich. *Automatische, Dekriptor-basierte Unterstützung der Dokumentanalyse zur Fokussierung und Klassifizierung von Geschäftsbriefen*. Diploma Thesis, Department of Computer Science, University of Kaiserslautern, May 1992 (in German).
- [Elliman90] D. G. Elliman, I. T. Lancaster. A review of segmentation and contextual analysis techniques for text recognition. *Pattern Recognition*, vol. 23, no. 3/4, 1990, pp. 337-346.
- [Finkler86] W. Finkler, G. Neumann. *MORPHIX – Ein hochportabler Lemmatisierungsmodul für das Deutsche*. Universität des Saarlandes (SFB 314), Memo Nr. 8, Saarbrücken, 1986 (in German).
- [Finkler88] W. Finkler, G. Neumann. MORPHIX – A Fast Realization of a Classification-Based Approach to Morphology. *Proceedings of 4th Österreichische Artificial-Intelligence-Tagung*; Springer Verlag, Berlin 1988; pp. 11-19.
- [Harris85] M. D. Harris. *Introduction to Natural Language Processing*. Reston Publishing Company Inc., Reston, Virginia, 1985.
- [ISO8613] ISO 8613 Information Processing, Text and Office Systems. *Office Document Architecture and Interchange Format (ODA/ODIF)*, parts 1-8, 1988.
- [Knuth73] D. E. Knuth. *The Art of Computer Programming. vol. III: Sorting and Searching*. Addison-Wesley, Reading, Mass., 1973.
- [Meier78] Helmut Meier. *Deutsche Sprachstatistik*. Georg Olms Verlag, Hildesheim, 2. erweiterte und verbesserte Auflage, Paperback, Band 31, 1978 (in German).
- [Peterson80a] J. L. Peterson. Computer Programs for Detecting and Correcting Spelling Errors. *Communications of the ACM*, vol. 23, no. 12, December 1980, pp. 676-687.

[Wagner92] Andreas Wagner. *Organisation und Zugriffsstrukturen eines Lexikons zur Dokumentanalyse — Ein hashbasierter Ansatz*. Diploma Thesis, Department of Computer Science, University of Kaiserslautern, June 1992 (in German).

[Wells90] C. J. Wells et al. Fast Dictionary Look-Up For Contextual Word Recognition. *Pattern Recognition*, vol. 23, no. 5, 1990, pp. 501-508.

Die folgenden DKL Veröffentlichungen sowie die aktuelle Liste von allen bisher erschienenen Publikationen können von der oben angegebenen Adresse bezogen werden. Die Bestände werden, wenn nicht anders sonst angegeben, für den Zeitraum 1989 bis 1992 angegeben.	Die folgenden DKL Publikationen auf der Liste sind publizierte Papers, die von der oben angewiesenen Adresse bezogen werden können. Die Bestände sind, wenn nicht anders sonst angegeben, für den Zeitraum 1989 bis 1992 angegeben.
BR-92-35 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-34 Kühn, W. G. Front-Ends for Hierarchical Extensions of Concept Languages for a Mechanical Engineering Application 17 pages
BR-92-33 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-32 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-31 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-30 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-29 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-28 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-27 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-26 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-25 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-24 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-23 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-22 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-21 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-20 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-19 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-18 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-17 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-16 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-15 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-14 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-13 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-12 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-11 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-10 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-09 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-08 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-07 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-06 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-05 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-04 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-03 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	BR-92-02 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages
BR-92-01 Kühn, W. G. Using Hierarchical Contextual Information for Label-Tool Selection in a CIM Environment 18 pages	



**Deutsches
Forschungszentrum
für Künstliche
Intelligenz GmbH**

**DFKI
-Bibliothek-
PF 2080
67608 Kaiserslautern
FRG**

DFKI Publikationen

Die folgenden DFKI Veröffentlichungen sowie die aktuelle Liste von allen bisher erschienenen Publikationen können von der oben angegebenen Adresse bezogen werden.
Die Berichte werden, wenn nicht anders gekennzeichnet, kostenlos abgegeben.

DFKI Publications

The following DFKI publications or the list of all published papers so far can be ordered from the above address.
The reports are distributed free of charge except if otherwise indicated.

DFKI Research Reports

RR-92-35

Manfred Meyer:
Using Hierarchical Constraint Satisfaction for
Lathe-Tool Selection in a CIM Environment
18 pages

RR-92-36

Franz Baader, Philipp Hanschke:
Extensions of Concept Languages for a Mechanical
Engineering Application
15 pages

RR-92-37

Philipp Hanschke: Specifying Role Interaction in
Concept Languages
26 pages

RR-92-38

Philipp Hanschke, Manfred Meyer:
An Alternative to H-Subsumption Based on
Terminological Reasoning
9 pages

RR-92-40

Philipp Hanschke, Knut Hinkelmann: Combining
Terminological and Rule-based Reasoning for
Abstraction Processes
17 pages

RR-92-41

Andreas Lux: A Multi-Agent Approach towards
Group Scheduling
32 pages

RR-92-42

John Nerbonne:
A Feature-Based Syntax/Semantics Interface
19 pages

RR-92-43

Christoph Klauck, Jakob Mauss: A Heuristic driven
Parser for Attributed Node Labeled Graph Grammars
and its Application to Feature Recognition in CIM
17 pages

RR-92-44

Thomas Rist, Elisabeth André: Incorporating
Graphics Design and Realization into the
Multimodal Presentation System WIP
15 pages

RR-92-45

Elisabeth André, Thomas Rist: The Design of
Illustrated Documents as a Planning Task
21 pages

RR-92-46

*Elisabeth André, Wolfgang Finkler, Winfried Graf,
Thomas Rist, Anne Schauder, Wolfgang Wahlster:*
WIP: The Automatic Synthesis of Multimodal
Presentations
19 pages

RR-92-47

Frank Bomarius: A Multi-Agent Approach towards
Modeling Urban Traffic Scenarios
24 pages

RR-92-48

Bernhard Nebel, Jana Koehler:
Plan Modifications versus Plan Generation:
A Complexity-Theoretic Perspective
15 pages

RR-92-49

Christoph Klauck, Ralf Legleitner, Ansgar Bernardi:
Heuristic Classification for Automated CAPP
15 pages

RR-92-50

Stephan Busemann:
Generierung natürlicher Sprache
61 Seiten

RR-92-51

Hans-Jürgen Bürckert, Werner Nutt:
On Abduction and Answer Generation through
Constrained Resolution
20 pages

RR-92-52

Mathias Bauer, Susanne Biundo, Dietmar Dengler, Jana Koehler, Gabriele Paul: PHI - A Logic-Based Tool for Intelligent Help Systems
14 pages

RR-92-53

Werner Stephan, Susanne Biundo: A New Logical Framework for Deductive Planning
15 pages

RR-92-54

Harold Boley: A Direkt Semantic Characterization of RELFUN
30 pages

RR-92-55

John Nerbonne, Joachim Laubsch, Abdel Kader Diagne, Stephan Oepen: Natural Language Semantics and Compiler Technology
17 pages

RR-92-56

Armin Laux: Integrating a Modal Logic of Knowledge into Terminological Logics
34 pages

RR-92-58

Franz Baader, Bernhard Hollunder: How to Prefer More Specific Defaults in Terminological Default Logic
31 pages

RR-92-59

Karl Schlechta and David Makinson: On Principles and Problems of Defeasible Inheritance
13 pages

RR-92-60

Karl Schlechta: Defaults, Preorder Semantics and Circumscription
19 pages

RR-93-02

Wolfgang Wahlster, Elisabeth André, Wolfgang Finkler, Hans-Jürgen Profitlich, Thomas Rist: Plan-based Integration of Natural Language and Graphics Generation
50 pages

RR-93-03

Franz Baader, Bernhard Hollunder, Bernhard Nebel, Hans-Jürgen Profitlich, Enrico Franconi: An Empirical Analysis of Optimization Techniques for Terminological Representation Systems
28 pages

RR-93-04

Christoph Klauck, Johannes Schwagereit: GGD: Graph Grammar Developer for features in CAD/CAM
13 pages

RR-93-05

Franz Baader, Klaus Schulz: Combination Techniques and Decision Problems for Disunification
29 pages

RR-93-06

Hans-Jürgen Bürckert, Bernhard Hollunder, Armin Laux: On Skolemization in Constrained Logics
40 pages

RR-93-07

Hans-Jürgen Bürckert, Bernhard Hollunder, Armin Laux: Concept Logics with Function Symbols
36 pages

RR-93-08

Harold Boley, Philipp Hanschke, Knut Hinkelmann, Manfred Meyer: COLAB: A Hybrid Knowledge Representation and Compilation Laboratory
64 pages

RR-93-09

Philipp Hanschke, Jörg Würtz: Satisfiability of the Smallest Binary Program
8 Seiten

RR-93-10

Martin Buchheit, Francesco M. Donini, Andrea Schaerf: Decidable Reasoning in Terminological Knowledge Representation Systems
35 pages

RR-93-11

Bernhard Nebel, Hans-Juergen Buerckert: Reasoning about Temporal Relations: A Maximal Tractable Subclass of Allen's Interval Algebra
28 pages

RR-93-12

Pierre Sablayrolles: A Two-Level Semantics for French Expressions of Motion
51 pages

RR-93-13

Franz Baader, Karl Schlechta: A Semantics for Open Normal Defaults via a Modified Preferential Approach
25 pages

RR-93-14

Joachim Niehren, Andreas Podelski, Ralf Treinen: Equational and Membership Constraints for Infinite Trees
33 pages

RR-93-15

Frank Berger, Thomas Fehrlé, Kristof Klöckner, Volker Schölles, Markus A. Thies, Wolfgang Wahlster: PLUS - Plan-based User Support Final Project Report
33 pages

RR-93-16

Gert Smolka, Martin Henz, Jörg Würtz: Object-Oriented Concurrent Constraint Programming in Oz
17 pages

RR-93-17

Rolf Backofen:
Regular Path Expressions in Feature Logic
37 pages

RR-93-18

Klaus Schild: Terminological Cycles and the
Propositional μ -Calculus
32 pages

RR-93-20

Franz Baader, Bernhard Hollunder:
Embedding Defaults into Terminological
Knowledge Representation Formalisms
34 pages

RR-93-22

Manfred Meyer, Jörg Müller:
Weak Looking-Ahead and its Application in
Computer-Aided Process Planning
17 pages

RR-93-23

Andreas Dengel, Ottmar Lutz:
Comparative Study of Connectionist Simulators
20 pages

RR-93-24

Rainer Hoch, Andreas Dengel:
Document Highlighting —
Message Classification in Printed Business Letters
17 pages

RR-93-26

Jörg P. Müller, Markus Pischel: The Agent
Architecture InteRRaP: Concept and Application
99 pages

RR-93-27

Hans-Ulrich Krieger:
Derivation Without Lexical Rules
33 pages

RR-93-28

*Hans-Ulrich Krieger, John Nerbonne,
Hannes Pirker:* Feature-Based Allomorphy
8 pages

RR-93-33

Bernhard Nebel, Jana Koehler:
Plan Reuse versus Plan Generation: A Theoretical
and Empirical Analysis
33 pages

RR-93-34

Wolfgang Wahlster:
VerbMobil Translation of Face-To-Face Dialogs
10 pages

RR-93-36

*Michael M. Richter, Bernd Bachmann, Ansgar
Bernardi, Christoph Klauck, Ralf Legleitner,
Gabriele Schmidt:* Von IDA bis IMCOD:
Expertensysteme im CIM-Umfeld
13 Seiten

DFKI Technical Memos**TM-91-13**

Knut Hinkelmann: Forward Logic Evaluation:
Developing a Compiler from a Partially Evaluated
Meta Interpreter
16 pages

TM-91-14

Rainer Bleisinger, Rainer Hoch, Andreas Dengel:
ODA-based modeling for document analysis
14 pages

TM-91-15

Stefan Busemann: Prototypical Concept Formation
An Alternative Approach to Knowledge Representation
28 pages

TM-92-01

Lijuan Zhang: Entwurf und Implementierung eines
Compilers zur Transformation von
Werkstückrepräsentationen
34 Seiten

TM-92-02

Achim Schupeta: Organizing Communication and
Introspection in a Multi-Agent Blocksworld
32 pages

TM-92-03

Mona Singh:
A Cognitive Analysis of Event Structure
21 pages

TM-92-04

*Jürgen Müller, Jörg Müller, Markus Pischel,
Ralf Scheidhauer:*
On the Representation of Temporal Knowledge
61 pages

TM-92-05

Franz Schmalhofer, Christoph Globig, Jörg Thoben:
The refitting of plans by a human expert
10 pages

TM-92-06

Otto Kühn, Franz Schmalhofer: Hierarchical
skeletal plan refinement: Task- and inference
structures
14 pages

TM-92-08

Anne Kilger: Realization of Tree Adjoining
Grammars with Unification
27 pages

TM-93-01

Otto Kühn, Andreas Birk: Reconstructive Integrated
Explanation of Lathe Production Plans
20 pages

TM-93-02

Pierre Sablayrolles, Achim Schupeta:
Conflict Resolving Negotiation for COoperative
Schedule Management
21 pages

DFKI Documents**D-92-16**

Judith Engelkamp (Hrsg.): Verzeichnis von Softwarekomponenten für natürlichsprachliche Systeme
189 Seiten

D-92-17

Elisabeth André, Robin Cohen, Winfried Graf, Bob Kass, Cécile Paris, Wolfgang Wahlster (Eds.): UM92: Third International Workshop on User Modeling, Proceedings
254 pages

Note: This document is available only for a nominal charge of 25 DM (or 15 US-\$).

D-92-18

Klaus Becker: Verfahren der automatisierten Diagnose technischer Systeme
109 Seiten

D-92-19

Stefan Ditttrich, Rainer Hoch: Automatische, Deskriptor-basierte Unterstützung der Dokumentanalyse zur Fokussierung und Klassifizierung von Geschäftsbriefen
107 Seiten

D-92-21

Anne Schauder: Incremental Syntactic Generation of Natural Language with Tree Adjoining Grammars
57 pages

D-92-22

Werner Stein: Indexing Principles for Relational Languages Applied to PROLOG Code Generation
80 pages

D-92-23

Michael Herfert: Parsen und Generieren der Prolog-artigen Syntax von RELFUN
51 Seiten

D-92-24

Jürgen Müller, Donald Steiner (Hrsg.): Kooperierende Agenten
78 Seiten

D-92-25

Martin Buchheit: Klassische Kommunikations- und Koordinationsmodelle
31 Seiten

D-92-26

Enno Tolzmann: Realisierung eines Werkzeugauswahlmoduls mit Hilfe des Constraint-Systems CONTAX
28 Seiten

D-92-27

Martin Harm, Knut Hinkelmann, Thomas Labisch: Integrating Top-down and Bottom-up Reasoning in COLAB
40 pages

D-92-28

Klaus-Peter Gores, Rainer Bleisinger: Ein Modell zur Repräsentation von Nachrichtentypen
56 Seiten

D-93-01

Philipp Hanschke, Thom Frühwirth: Terminological Reasoning with Constraint Handling Rules
12 pages

D-93-02

Gabriele Schmidt, Frank Peters, Gernod Laufkötter: User Manual of COKAM+
23 pages

D-93-03

Stephan Busemann, Karin Harbusch(Eds.): DFKI Workshop on Natural Language Systems: Reusability and Modularity - Proceedings
74 pages

D-93-04

DFKI Wissenschaftlich-Technischer Jahresbericht 1992
194 Seiten

D-93-05

Elisabeth André, Winfried Graf, Jochen Heinsohn, Bernhard Nebel, Hans-Jürgen Profitlich, Thomas Rist, Wolfgang Wahlster: PPP: Personalized Plan-Based Presenter
70 pages

D-93-06

Jürgen Müller (Hrsg.): Beiträge zum Gründungsworkshop der Fachgruppe Verteilte Künstliche Intelligenz Saarbrücken 29.-30. April 1993
235 Seiten

Note: This document is available only for a nominal charge of 25 DM (or 15 US-\$).

D-93-07

Klaus-Peter Gores, Rainer Bleisinger: Ein erwartungsgesteuerter Koordinator zur partiellen Textanalyse
53 Seiten

D-93-08

Thomas Kieninger, Rainer Hoch: Ein Generator mit Anfragesystem für strukturierte Wörterbücher zur Unterstützung von Texterkennung und Textanalyse
125 Seiten

D-93-09

Hans-Ulrich Krieger, Ulrich Schäfer: TDL ExtraLight User's Guide
35 pages

D-93-12

Harold Boley, Klaus Elsbernd, Michael Herfert, Michael Sintek, Werner Stein: RELFUN Guide: Programming with Relations and Functions Made Easy
86 pages

D-93-01 Klausur zur Gewerkschaftsberatung - Ein Modell zur Reorganisation von Fachabteilungen
26 Seiten

D-93-01 Planungstechnik, Team-Führung, Technologisches Rechnungswesen, Handling-Kriterien
42 pages

D-93-02 Gewerkschaftsberatung, Frankfurter Gewerkschaftsforum, 1. Inter-Konferenz der GOK/AMF
22 pages

D-93-03 2. Tagung des Bundesverbandes für Arbeitswissenschaft (FAW) DEKI-Workshop on National Language Systems, Productivity and Modularity - Proceedings
34 pages

D-93-04 Die Wissenschaftlich-Technische Arbeitswissenschaft
1992
194 Seiten

D-93-05 Klausurarbeit, Wilhelm-Greif, Technischer Mitarbeiter, Arbeitswissenschaft, Handlungsfelder, Prof. Dr. Wolfgang R. Götter, Prof. Dr. Rüdiger Pflüger, Prof. Dr. Rüdiger Pflüger
10 pages

D-93-06 Jürgen Müller (Hrsg.) Beiträge zum Gründungswort der Fachgruppe Vertrieb, Klinische Fachgruppen, Göttingen 20. April 1993
413 Seiten

D-93-07 Klausur zur Gewerkschaftsberatung, Ein Organisationsmodell zur Reorganisation von Textabteilungen
23 Seiten

D-93-08 Klausurarbeit, Klausurarbeit, Ein Organisationsmodell zur Reorganisation von Textabteilungen, Ein Organisationsmodell zur Reorganisation von Textabteilungen
122 Seiten

D-93-09 Die Textabteilung, Klausurarbeit, Klausurarbeit, Klausurarbeit
22 pages

D-93-10 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
80 pages

DEKI Documents

D-93-16 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
199 Seiten

D-93-17 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
204 pages

D-93-18 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
108 Seiten

D-93-19 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
107 Seiten

D-93-21 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
77 pages

D-93-22 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
80 pages


D-93-23 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
21 Seiten


D-93-24 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
75 Seiten


D-93-25 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
81 Seiten

D-93-26 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
28 Seiten

D-93-27 Klausurarbeit, Klausurarbeit, Klausurarbeit, Klausurarbeit
40 pages

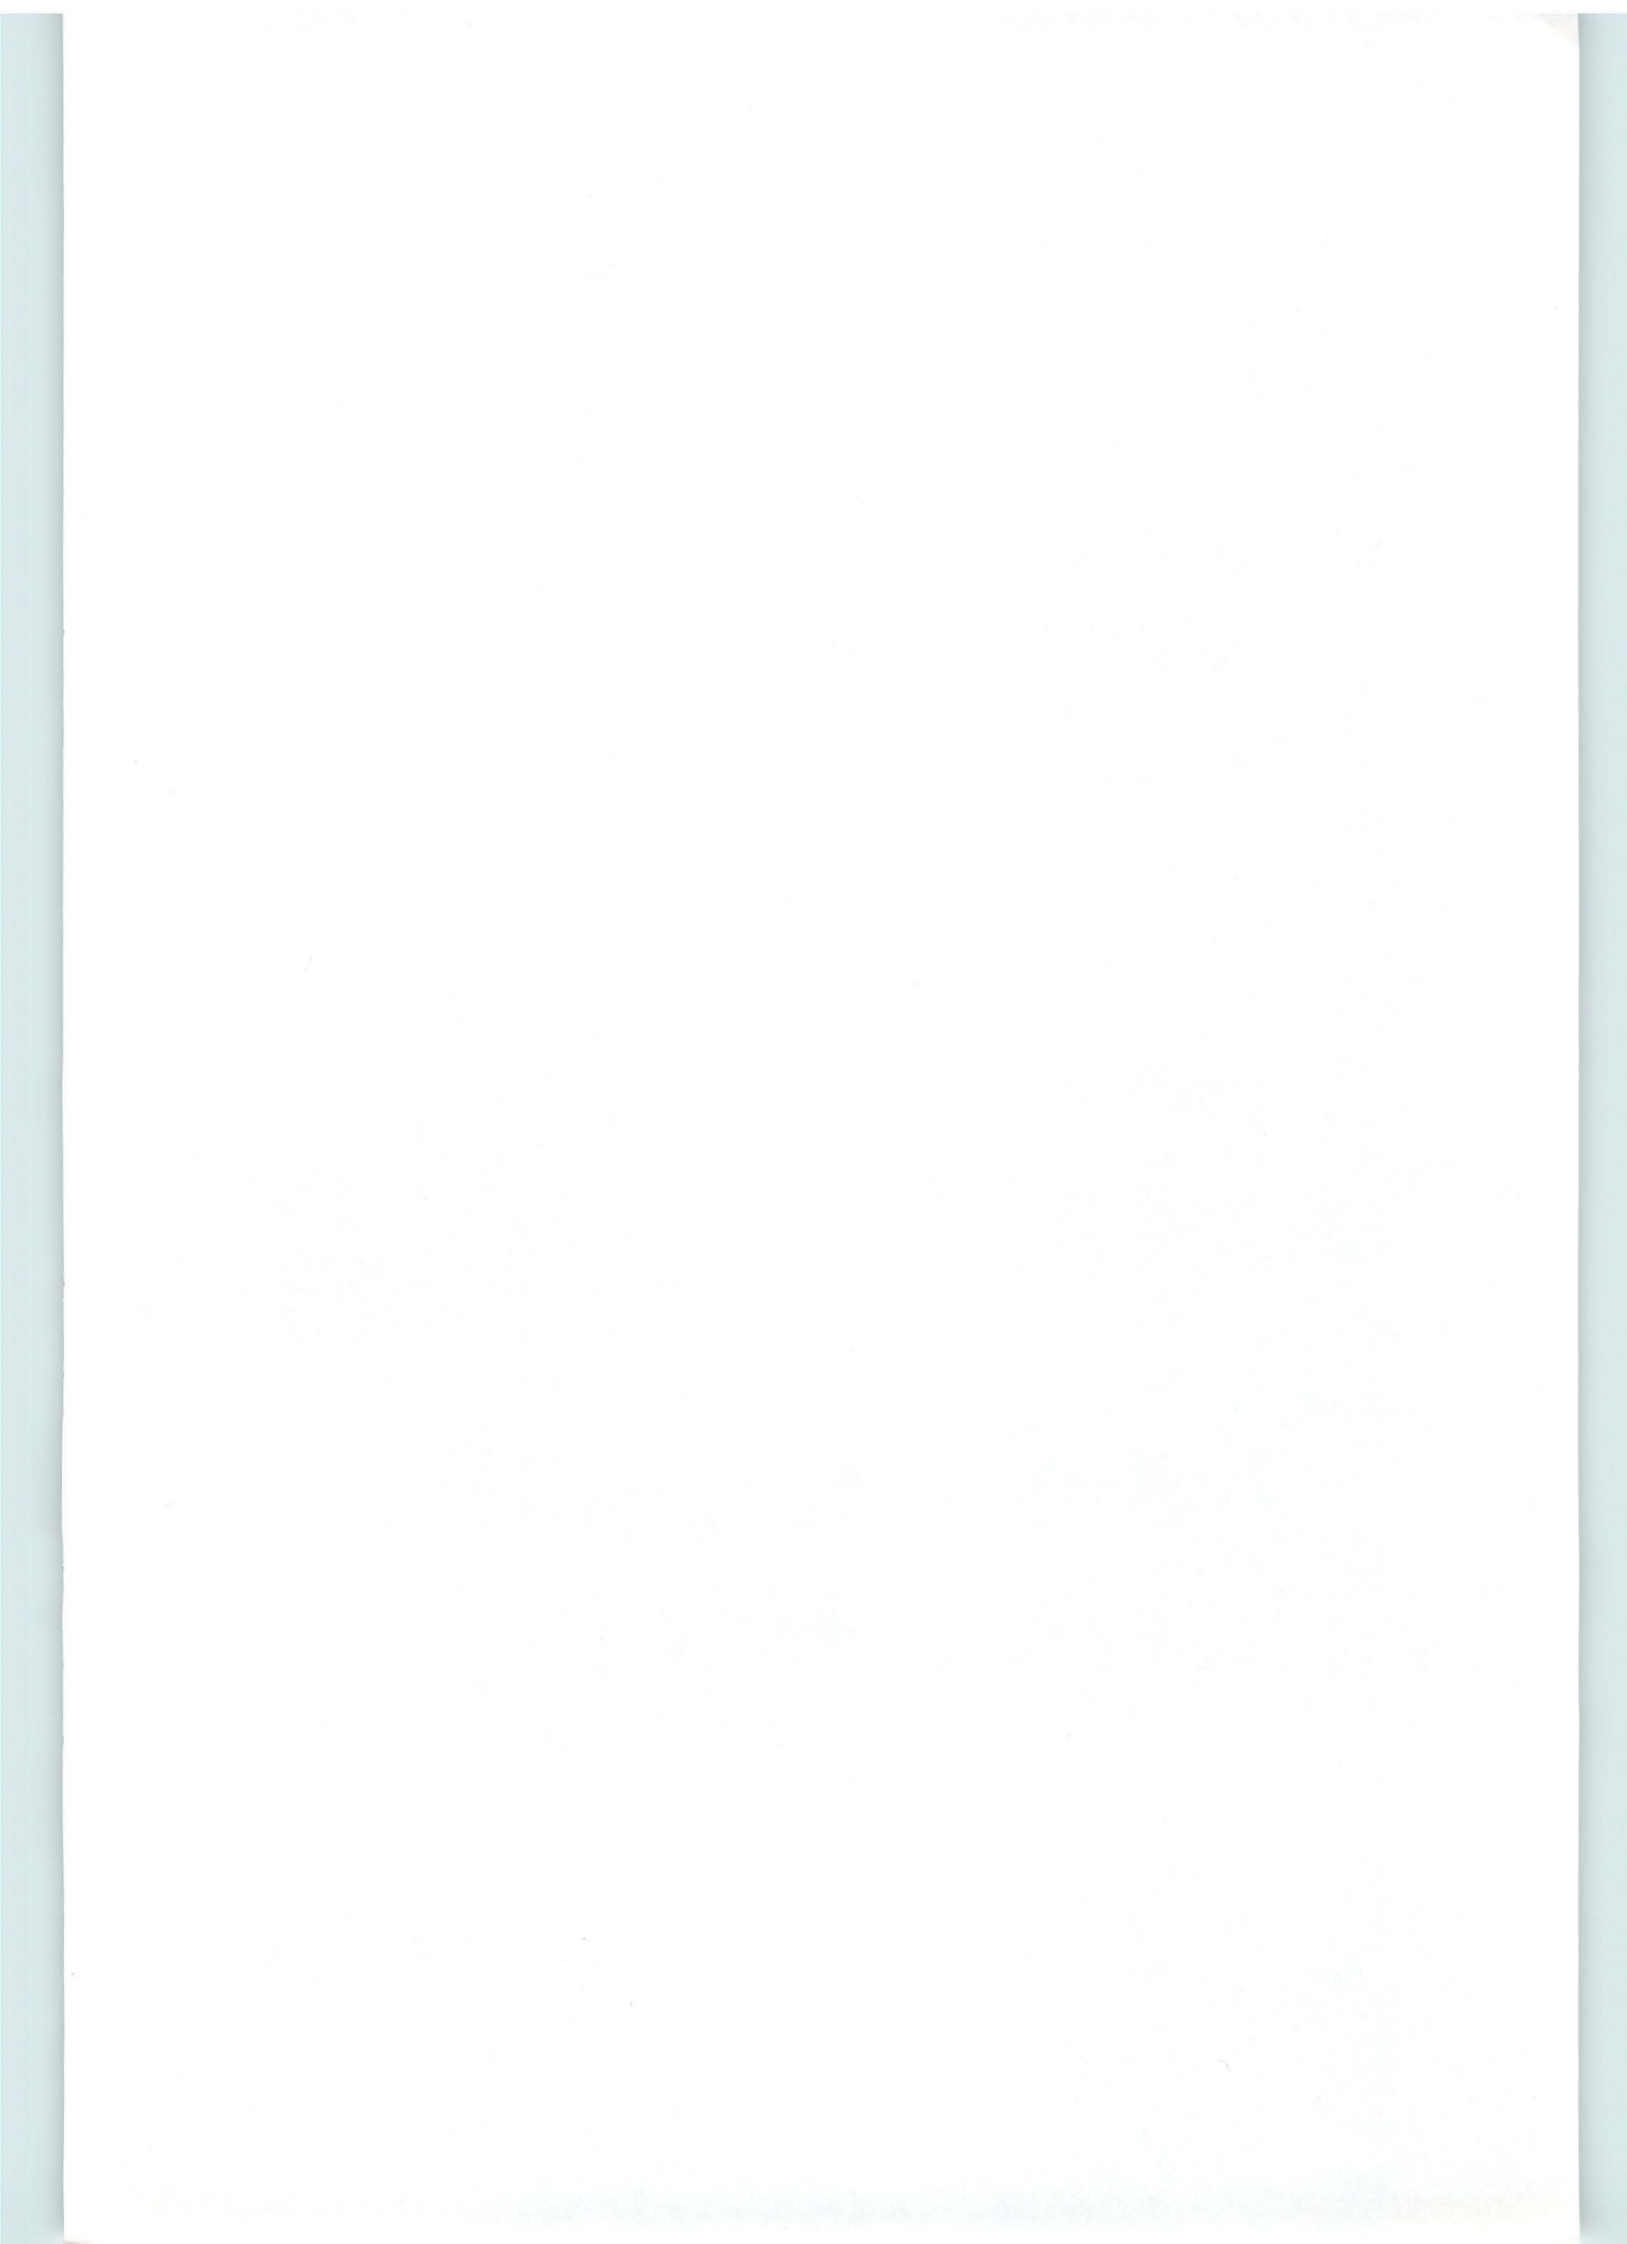

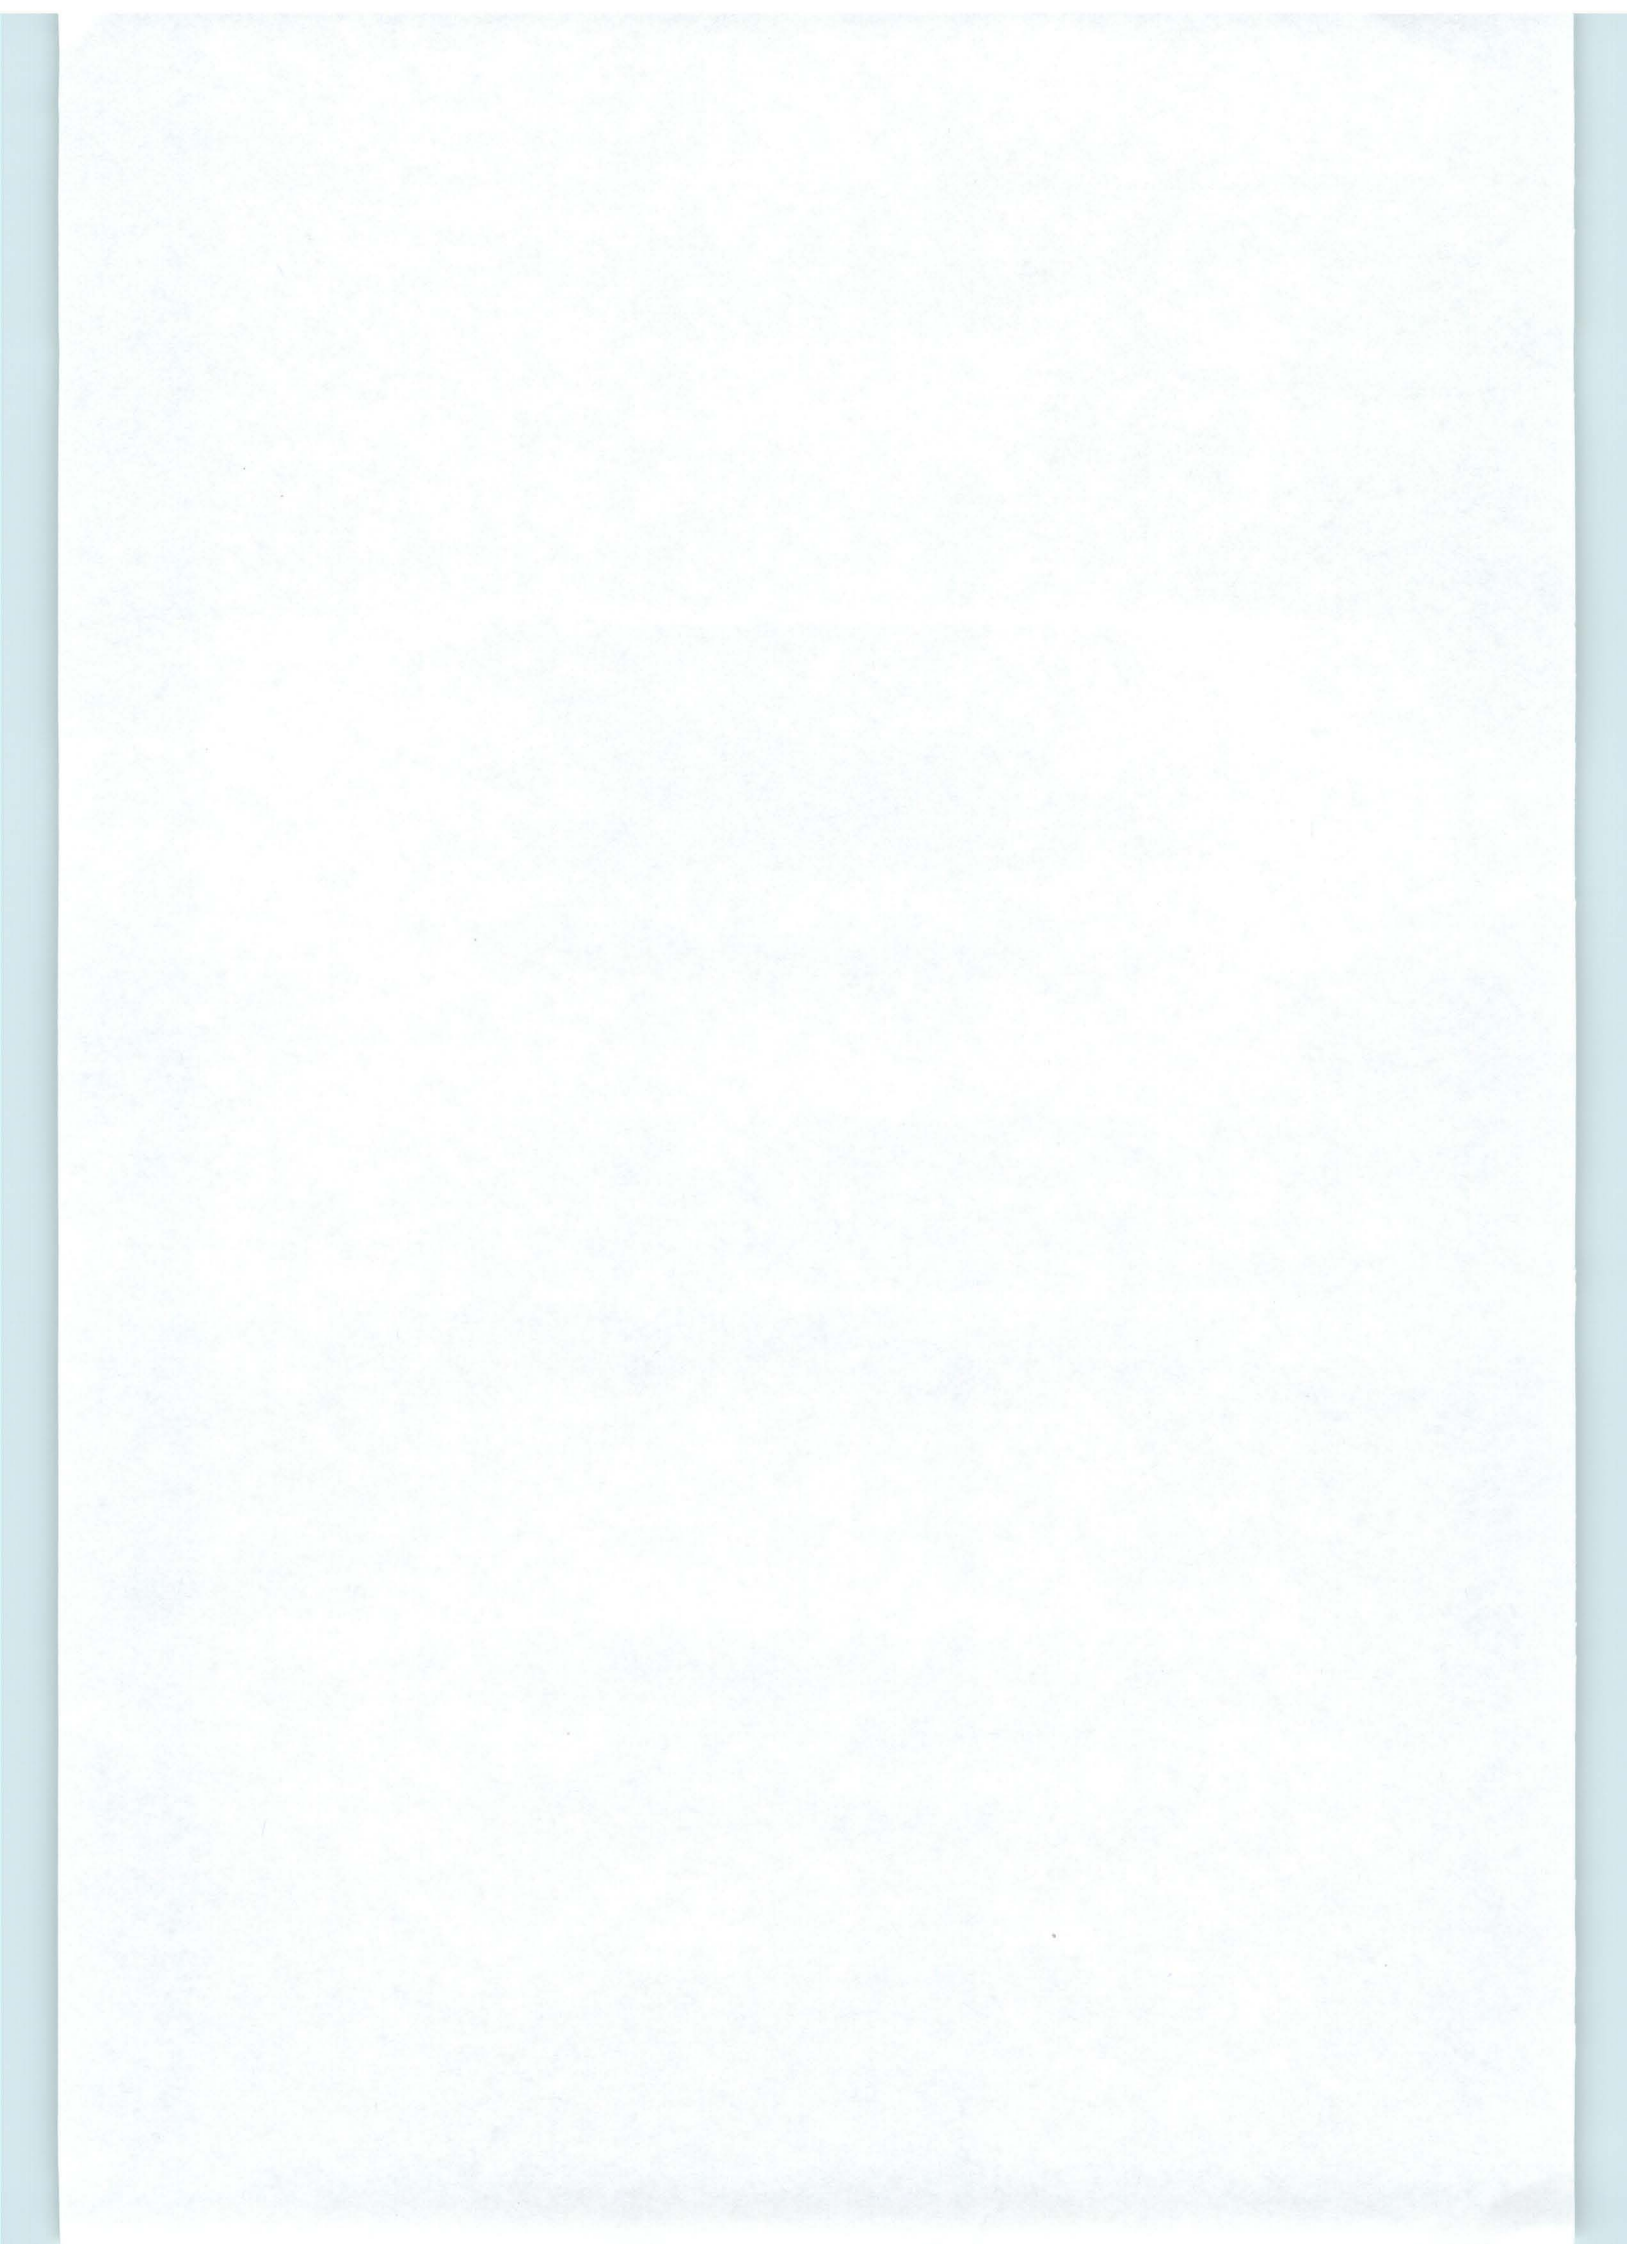

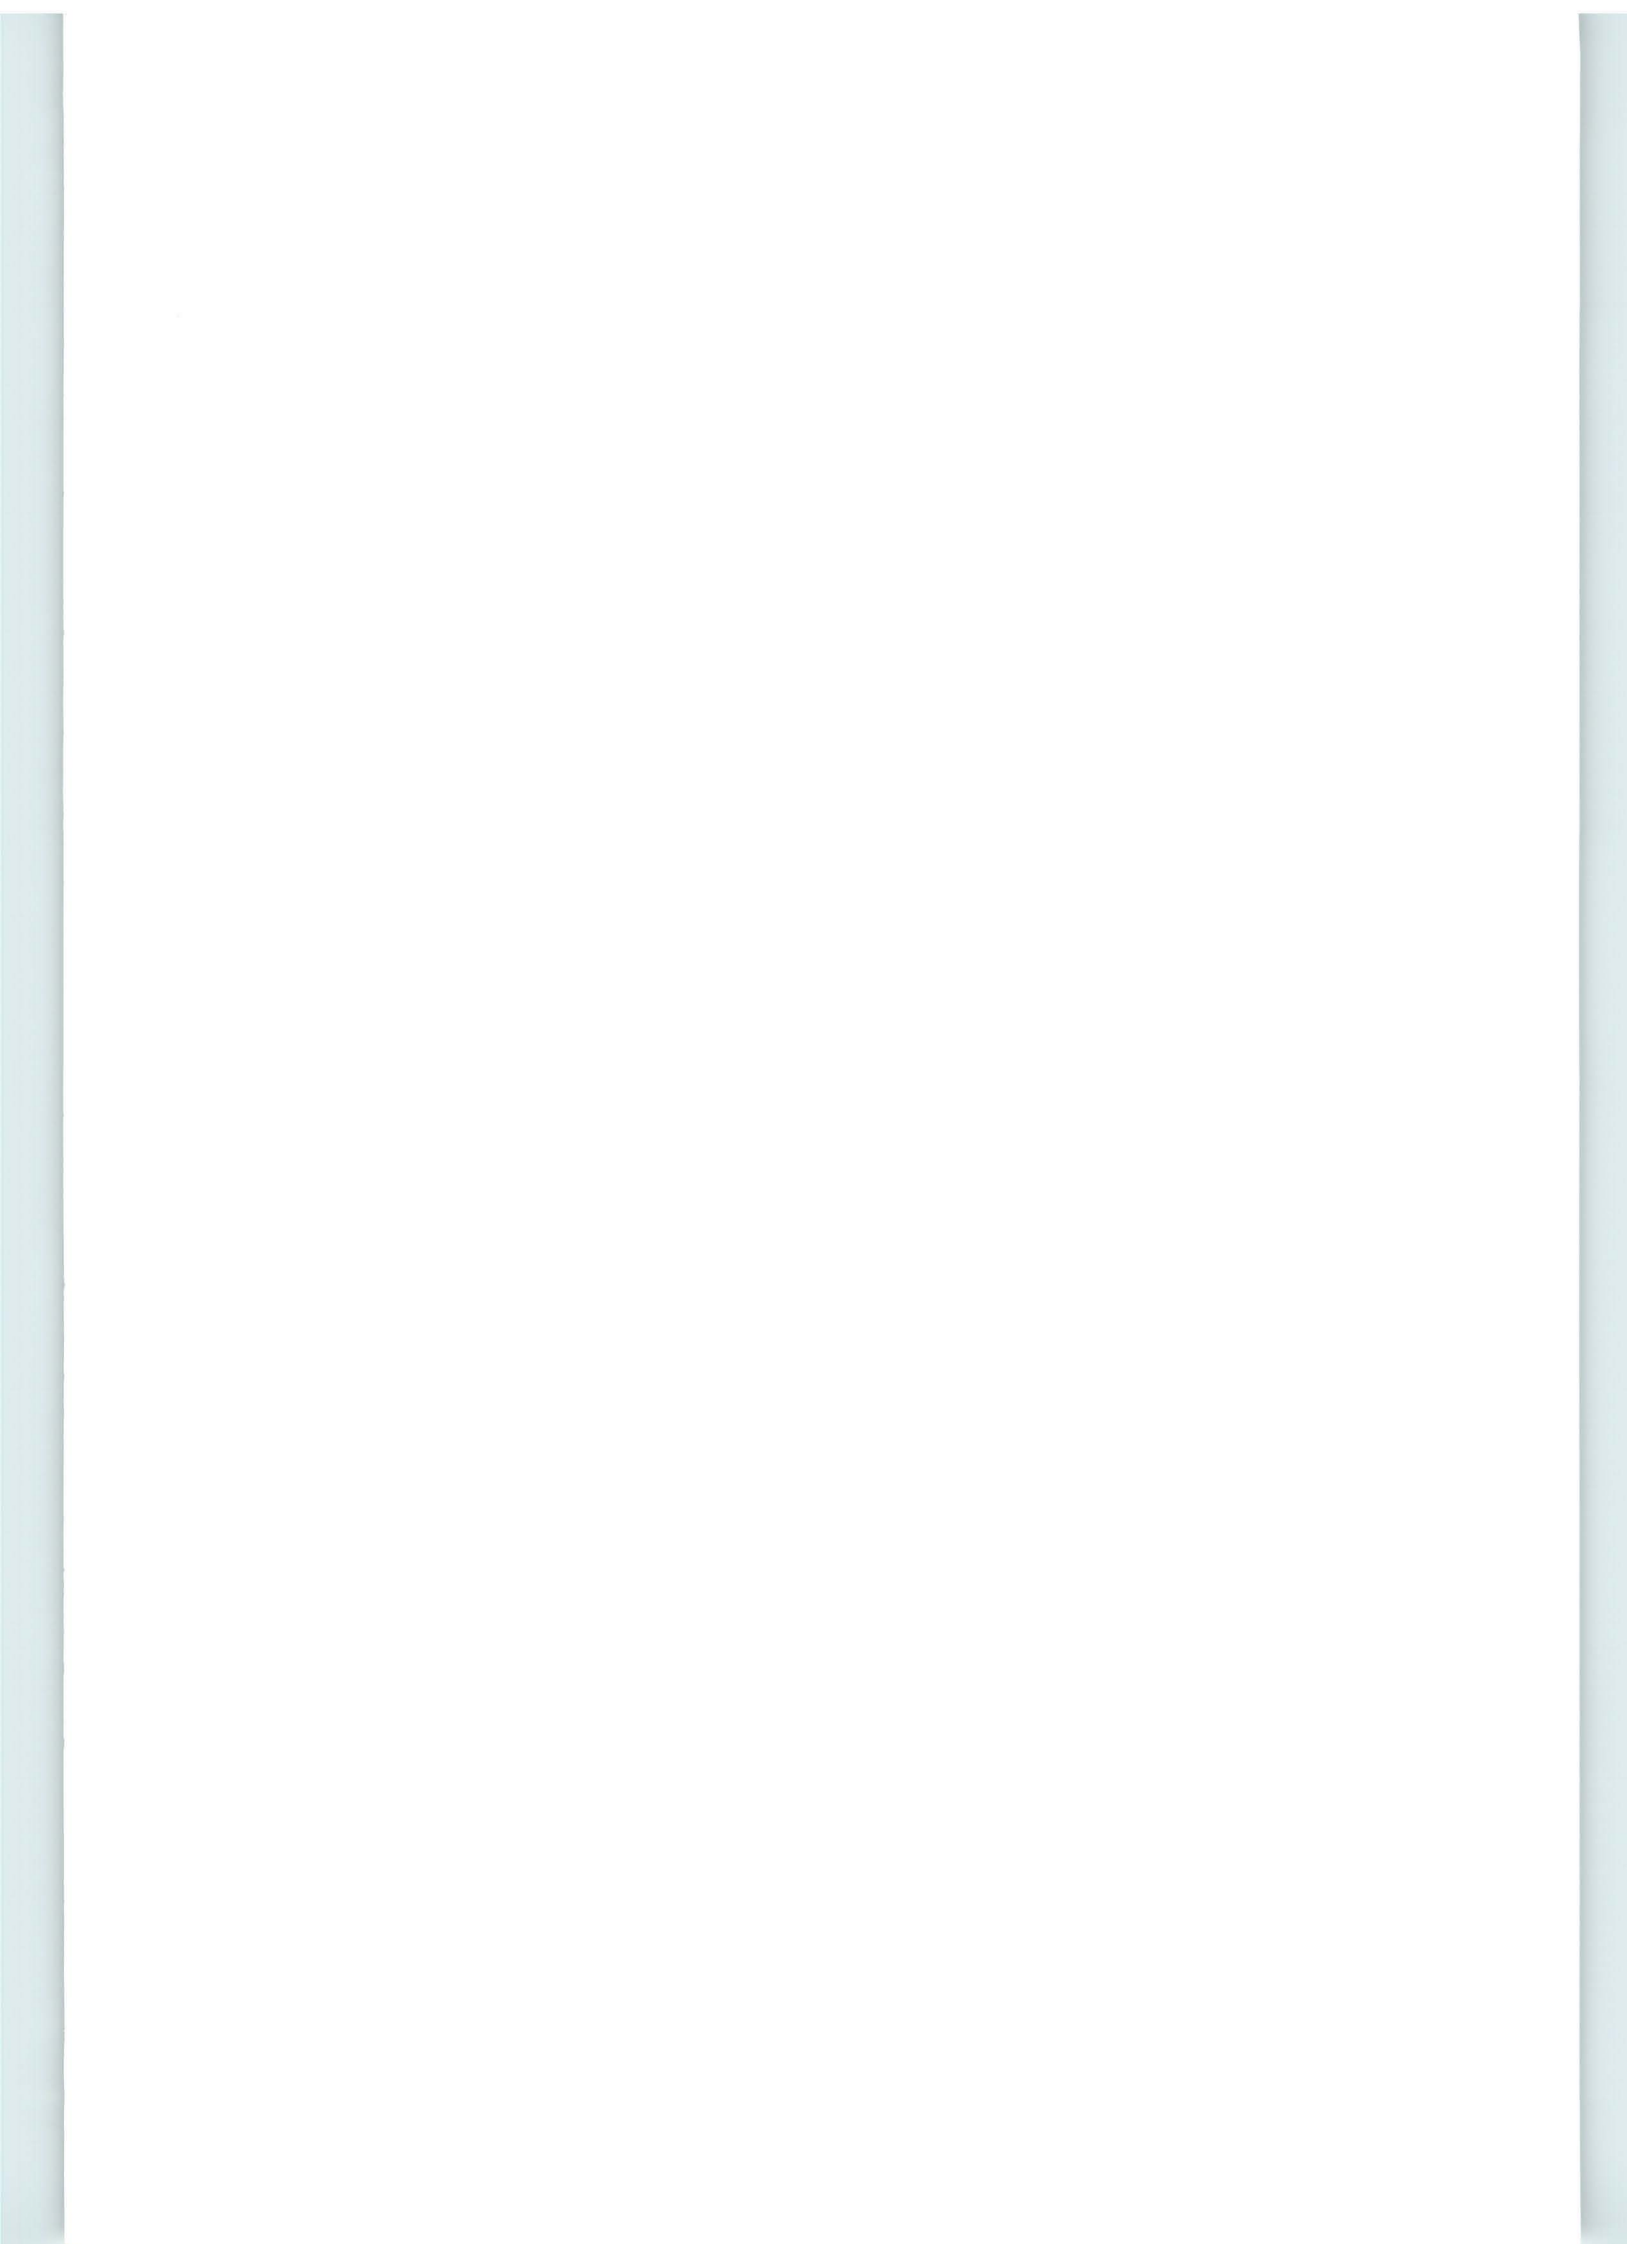

Designing a Structured Lexicon for Document Image Analysis

Rainer Hoch, Michael Malburg

RR-92-32

Research Report